

230 Volt - 50 Hz / 60 Hz

These AC fans are equipped with dual NMB precision ball-bearings for long service life and long-lasting balance.
Arbitrary mounting position.
Air intake over struts.
Rotation is counterclockwise (left) when viewed from the name plate.

Casing material is aluminium, impeller made from reinforced plastic acc. to UL 94 V-0

Capacitor motor, impedance protected, protected by a thermo switch

Connection via 2 tinned flat pins, 2,8 x 0,5 mm




Earth connection via M4 thread

Operating temperature is -40 °C to +60 °C

Weight: 550 g

Approvals: CE, CSA LR65829, CUL E89936

AC fans 119 x 119 x 38 Manufacturer NMB

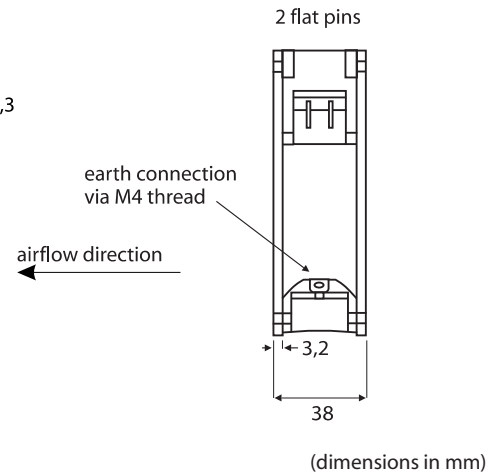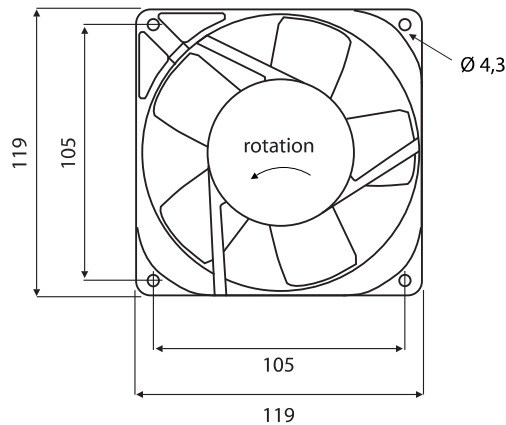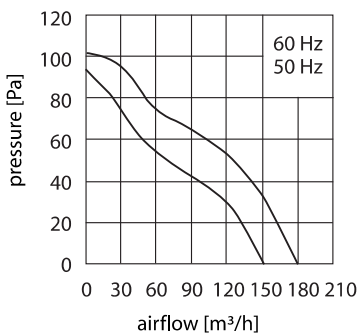

Type	voltage V / Hz	current mA	airflow m³/h	pressure Pa	speed rpm ⁻¹	noise dB _(A)	service life h L ₁₀ /20 °C
4715FS-23T-B5A-D01	230 / 50-60	90 / 80	156 / 187	93 / 100	2.600 / 3.100	38 / 45	50.000