

230 Volt / 115 Volt - 50 Hz / 60 Hz

These AC fans are equipped with dual NMB precision ball-bearings for long service life and long-lasting balance.
Arbitrary mounting position.
Air exhaust over struts.
Rotation is counterclockwise (left) when viewed from the name plate.

Casing material is aluminium, impeller made from reinforced plastic acc. to UL 94 V-0

Shaded pole motor, impedance protected

Connection via tinned and lead wires, UL 3266, AWG 22, length 300 mm

Separate earth connection

Operating temperature range is -10 °C to +70 °C


Weight: 240 g

Approvals: CE, CUL E89936

AC fans 80 x 80 x 25 Manufacturer NMB



CE c UL US

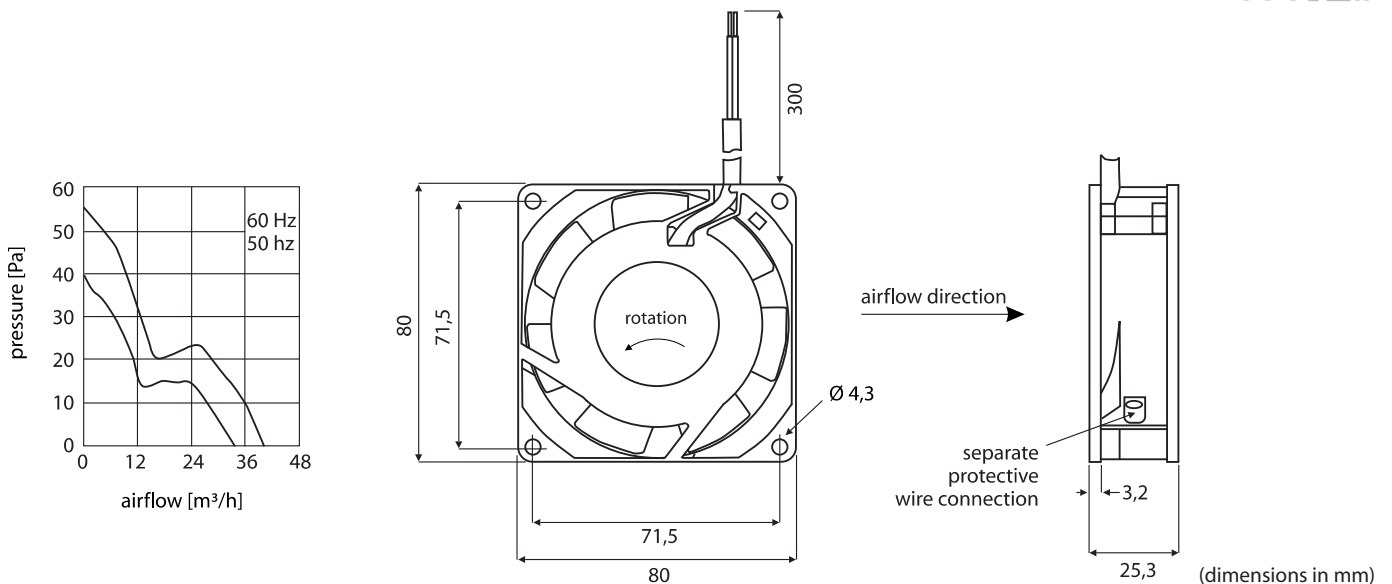

Type	voltage V / Hz	current mA	air flow m³/h	pressure Pa	speed rpm	noise dB _(A)	service life h L ₁₀ /25 °C
3110MS-12W-B30-A00	115 / 50-60	130 / 120	34,2 / 40,8	39,0 / 55,0	2.500 / 3.000	24 / 31	100.000
3110MS-23W-B30-A00	230 / 50-60	50 / 45	34,2 / 40,8	39,0 / 55,0	2.500 / 3.000	24 / 31	100.000