


## 12 Volt

These DC fans are equipped with dual NMB precision ball-bearings for long service life and long-lasting balance.  
Arbitrary mounting position.  
Air exhaust over struts.  
Rotation is clockwise (right) when viewed from the name plate.

Casing and impeller material is reinforced plastic according to UL 94 V-0  
Protected against blocking and reverse polarity, auto restart  
Connection via tinned and lead wires, UL 1061, AWG 26 (red/black), length 200 mm  
Operating temperature range is -10 °C to +60 °C  
Weight: 25 g  
Approvals: CE, CSA LR65829 1255295, UL E89936, VDE 15073-0018

## DC fans 52 x 52 x 15 Manufacturer NMB

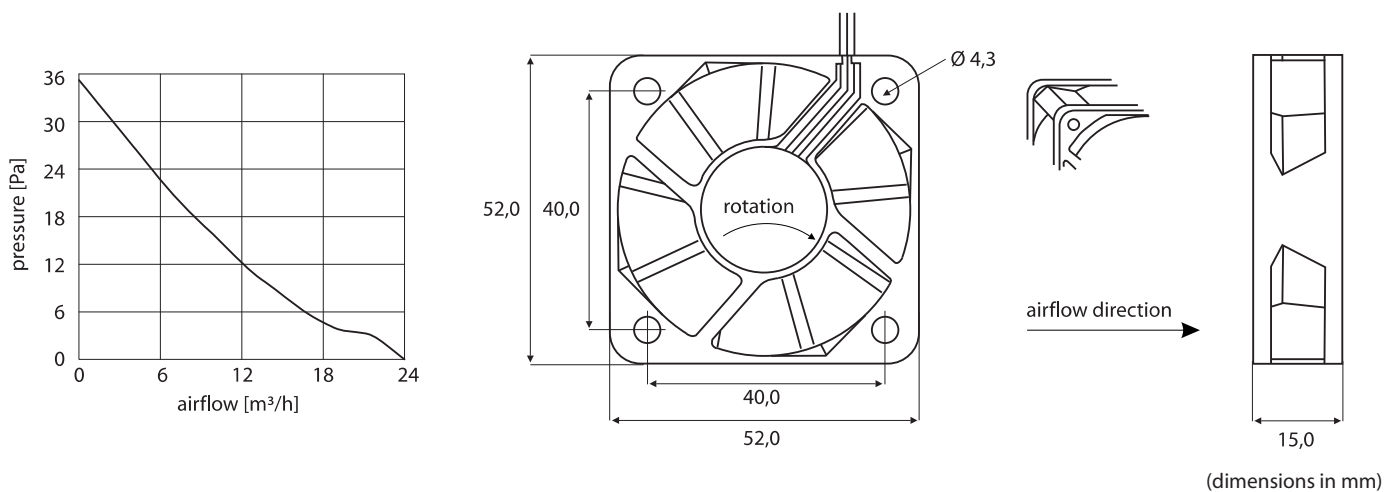

Type	voltage V	current mA	airflow m³/h	pressure Pa	speed rpm	noise dB <sub>(A)</sub>	service life h L <sub>10</sub> /25 °C
2106KL-04W-B50-L00	12 (10,2 - 13,0) *	130	24,0	35	4.900	30	77.000

\* operating voltage