


12 Volt - 24 Volt

These DC fans are equipped with dual NMB precision ball-bearings for long service life and long-lasting balance.
Arbitrary mounting position.
Air exhaust over struts.
Rotation is clockwise (right) when viewed from the name plate.

DC fans 80 x 80 x 15 Manufacturer NMB

- Casing and impeller material is reinforced plastic according to UL 94 V-0
- Protected against blocking and reverse polarity, auto restart
- Connection via tinned and lead wires, UL 1007, AWG 26 (red/black), length 300 mm
- Operating temperature range is -10 °C to +60 °C (24 V) / -10 °C to +50 °C (12 V)
- Weight: 50g
- Approvals: CE, CSA, UL, VDE

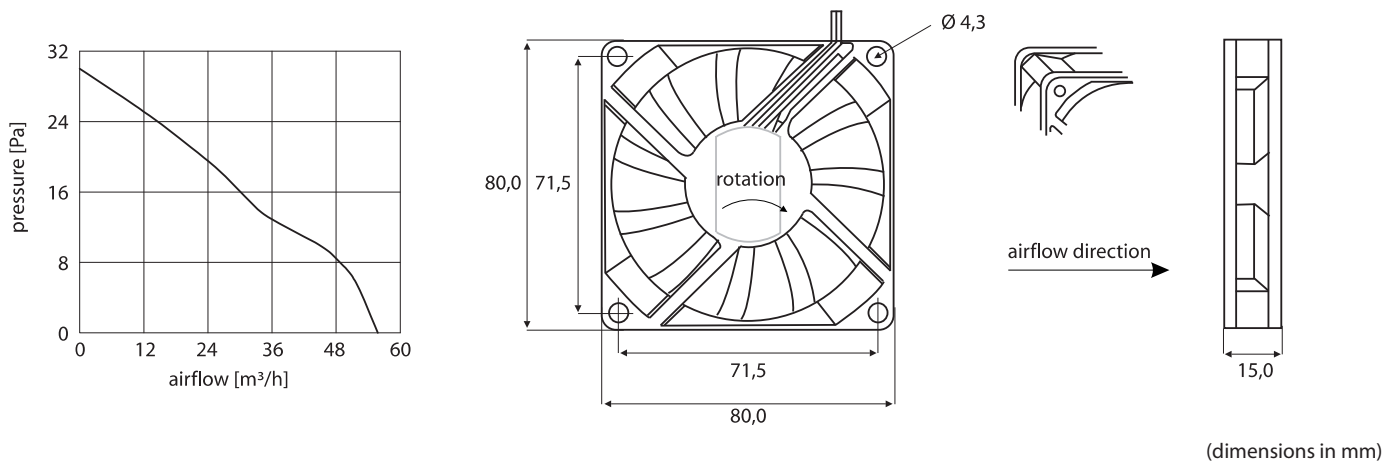

Type	voltage V	current mA	airflow m³/h	pressure Pa	speed rpm	noise dB _(A)	service life h L ₁₀ /25 °C
3106KL-04W-B50-C00	12 (6,0 - 13,0) *	230	55,8	30	3.000	34	60.000
3106KL-05W-B50-B00	24 (10,0 - 27,6) *	120	55,8	30	3.000	34	70.000

* operating voltage